

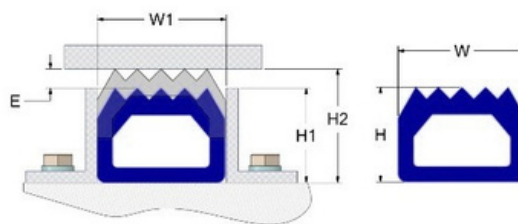




1021 CASTELLATED SHARP PROFILE



profile ref.	Profile Dimensions		Groove Dimensions		
	WxH mm	E max. mm	W1 +0.2/-0.0 mm	H1 mm	H2 mm
AS007-1021	6.50 x 5.00	1.50	7.00	5.50	6.50
AS010-1021	10.00 x 8.00	2.00	10.50	8.50	10.00
AS016-1021	16.00 x 14.00	3.50	17.00	14.50	17.50
AS020-1021	20.00 x 20.00	4.00	21.00	21.00	24.00



profile ref.	Radii		
	R Axial (fig.1) mm	RO (fig. 2) mm	RI (fig. 3) mm
AS007-1021	19.00	22.00	25.50
AS010-1021	35.00	35.00	44.50
AS016-1021	41.50	41.50	54.00
AS020-1021	54.00	54.00	83.00

Pressure Data	
Min. Internal pressure Mpa	Max. Internal pressure Mpa
0.2	0.3
0.2	0.3
0.2	0.3
0.2	0.3

profile ref.	AIR Connectors			
	AS-C1 Plain Tube (mm)	AS-C2 Male Thread	AS-C3 Tube conn. Hose ID (mm)	AS-C4 Plain Tube- O-ring Bore (mm)
AS007-1021	4	M4	4	4
AS010-1021	4-6	M4-M6	4-6	4-6
AS016-1021	4-8	M4-M8	4-8	4-8
AS020-1021	4-10	M4-M10	4-10	4-10

